


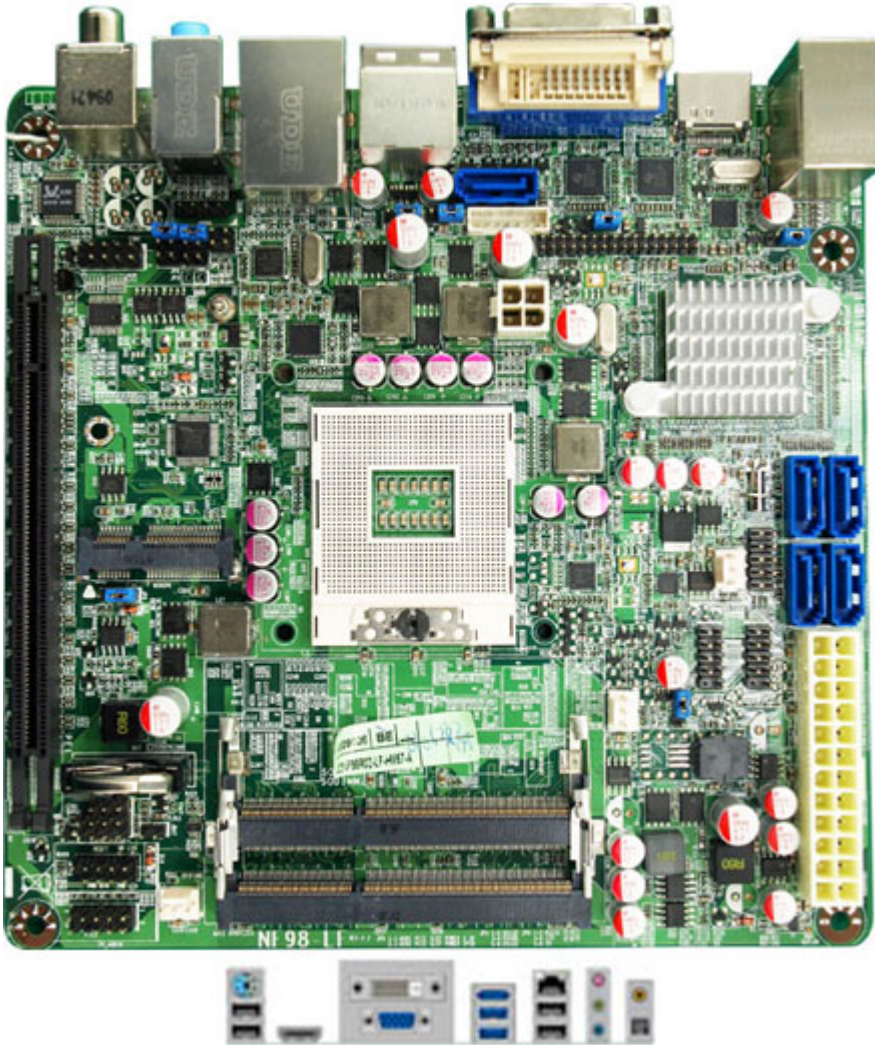

199.00 EUR  
incl. 19% VAT, plus [shipping](#)

Support:  [Specifications \[EN\]](#)

- Intel® QM57 Express Chipset
  - **Supports Intel Core™ i3, i5, i7 Mobile Processors**
  - Dual Channel DDR3-800/1066 up to 8GB
  - **Intel 82577LM Gigabit LAN**
  - Intel Active Management Technology ( iAMT 6.0 )
  - PCI Express x16 2.0 Slot, PCI Express Mini Card Slot
  - **Integrated 24-bit Dual Channel LVDS**
  - **5-port SATA 3Gb/s with RAID 0, 1, 5, 10 & JBOD Support**
  - HDMI, DVI-D, and VGA Video Outputs
  - Built-in Watchdog Timer Technology
  - Mini-ITX Form Factor (170mm x 170mm)
  - **Includes CPU Heatsink/Fan for <35W Processors**
- 
- |                                                                                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>• <b>CPU</b></li> <li>• <b>Chipset / Video</b></li> <li>• <b>Memory</b></li> <li>• <b>Expansion Slots</b></li> </ul> | <ul style="list-style-type: none"> <li>• Intel Core i3, i5, i7 mobile processors</li> <li>• Socket G (rPGA988A), Includes CPU Heatsink/fan for &lt;35W processors</li> <li>• Intel QM57 Express Chipset</li> <li>• Intel HD Graphics ( requires compatible CPU with built-in GPU )</li> <li>• 2 * SODIMMs Sockets for un-buffered dual channel DDR3-800/1066 up to 8 GB</li> <li>• 1 * PCI Express x16 2.0 (by 16-lane) slot</li> <li>• 1 * PCI Express Mini Card slot</li> </ul> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

- **Storage**
  - **Audio**
  - **Networking**
  - **LVDS**
  - **USB**
  - **Special Features**
  - **Rear I / O**
  - **Internal I / O**
  - **BIOS**
  - **Form Factor**
  - **Functional**
  - **Compliance**
  - **Temperature**
- 5 \* Serial ATA II 3Gb/s connectors
  - VIA VT 1705 6-Channel HD Audio
  - Intel 82577LM Gigabit Ethernet LAN
  - Intel Active Management Technology support ( iAMT 6.0 )
  - Onboard 24-bit dual channel LVDS connector
  - Embedded 10 \* USB 2.0/1.1
  - Supports ACPI S3, CPU Smart FAN, All solid capacitors
  - Watchdog hardware monitor
  - 6 \* USB 2.0/1.1 ports
  - 1 \* PS/2 KB/mouse combo connector
  - 1 \* RJ-45 port
  - 1 \* HDMI port
  - 1 \* VGA port
  - 1 \* DVI-D port
  - 1 \* eSATA port
  - 1 \* Audio port (Line-in, MIC and Line-out)
  - 1 \* Coaxial Out & 1 \* Optical Out
  - 2 \* USB 2.0/1.1 headers for 4 USB ports
  - 1 \* 24-bit dual channel LVDS header
  - 1 \* Serial header ( RS232/422/485 )
  - 1 \* GPIO header
  - 1 \* Audio header, 1 \* Front panel header
  - 1 \* 24-pin ATX power connector, 1 \* 4-pin 12V ATX power connector
  - AMI EFI 64MB SMT Flash ROM
  - Mini-ITX Form Factor (170mm x 170mm)
  - ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation
  - CE, FCC, RoHS, EuP
  - Operating within 0~60 centigrade
  - Storage within -20-85 centigrade

**Product Accessories**

- COM cable
- Manual
- CD
- 1x SATA cable
- I/O shield
- CPU fan
- Thermal grease