
ZOTAC H61-ITX WiFi (LGA1155) [H61ITX-A-E]

[http://www.cartft.com/catalog/il/1489]



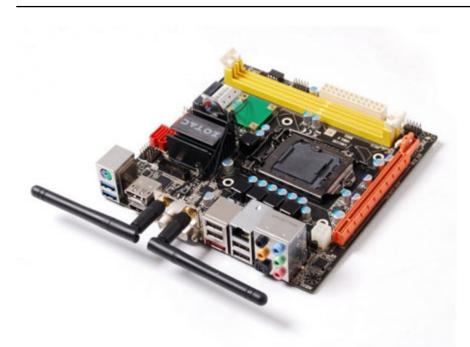

999.00 EUR incl. 19% VAT, plus shipping

Assemble the perfect small form factor system for all your computing demands with the flexible ZOTAC® H61-ITX WiFi mini-ITX platform. The ZOTAC® H61-ITX WiFi supports socket LGA1155 2nd generation Intel® Core™ family processors with turbocharged Intel® HD Graphics to let users select the perfect amount of processing power for their needs – whether it is dual or quad-core, with or without Intel® HyperThreading™ technology.

Demanding gamers can install a standard PCI Express x16 ZOTAC® graphics card in the H61-ITX WiFi to form a perfect miniature gaming PC that delivers big system power in a miniature form factor. A mix of four total SATA 3.0 Gb/s and eSATA ports on the ZOTAC® H61-ITX WiFi enable users to maximize storage connectivity and complete the ultimate home theatre PC or home file server.

Product Name	
Product Name	ZOTAC H61-ITX WiFi
Model	
Model	H61ITX-A-E
Chipset	
Manufacturer	Intel®
Chipset	H61 Express
GPU	Intel® HD Graphics 2000/3000 ready
CPU Compatibility	
Name	2nd Generation Intel® Core™ series 2000 Series
	Intel® Core i3 i5 and i7 ready
Socket	LGA1155
Bus	N/A
Memory	
Memory Type	DDR3
Memory Speed	1333 MHz
Slots	2 x 240-pin DIMM
Capacity	Up to 16GB
CPU and Memory Compatibility List	
CPU and Memory Compatibility List	see above
3D API	
DirectX	DirectX® 10.1
OpenGL	OpenGL® 2.1
Expansion	
Slots	1 x PCI Express x16
	1 x Mini-PCI Express (occupied by WiFi card)



ZOTAC H61-ITX WiFi (LGA1155) [H61ITX-A-E]

[http://www.cartft.com/catalog/il/1489]

Networking		
Ethernet	10/100/1000Mbps	
WiFi	802.11n	

Audio

Analog na Digital na

Ports

1 (HDCP) 1 (HDMI 1.4a) **HDMI**

Display Port

VGA With included adapter SATA 3 (SATA 3.0 Gb/s)

eSATA 1 PATA N/A PS/2 1

Serial Port Serial port header

USB Ports 4 USB 3.0 (2 on back panel / 2 on pin header)

8 USB 2.0 (4 on back panel / 4 on pin header)

FireWire Ports N/A

Coole Passive (no fan)

orm Factor Form Factor mini-ITX

OS Compatibility Windows Windows® Vista / 7 ready

General

SLI Supported 2048 x 1536

Maximum Resolution

Wake-On Support na No Overclocking features

Packaging

3 x SATA cables Package Contents 1 x DVI-to-VGA adapter

> 1 x I/O back plate 2 x WiFi antennas

1 x 4-pin power extension cable

Graphics Output 1 DVI / 1 HDMI / 1VGA / 1 DP